


# Passivierung säurefrei

For stainless steel

- For all stainless steels
- Yield: 4 - 10 m<sup>2</sup> / KG
- Contact time: 20 - 50 min
- No labeling according to ADR/RID/GHS

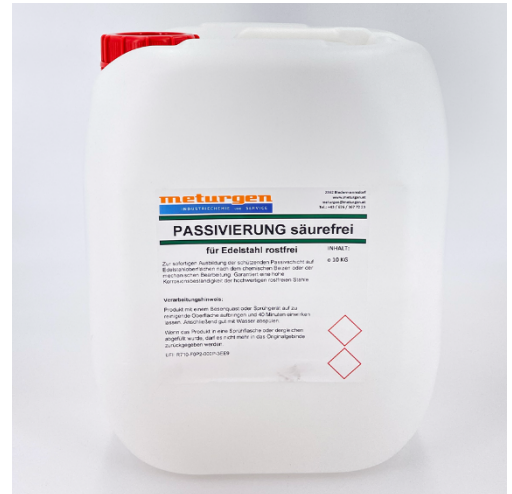

## Product description

Passivation acid-free was developed for the passivation of stainless steels. Stainless steel only acquires its corrosion-resistant properties through the formation of a passive layer. The self-passivation process would take approx. 3 weeks. The formation of the passive layer can be checked with a new passive layer tester. Can be used on all stainless steels.

## Processing

Passivation acid-free is applied by spraying or dipping. The exposure time is 30 to 50 minutes. Afterwards, the solution must be rinsed off with clean water. The product is not subject to labeling according to ADR/RID or GHS. Product residues on the surface do not lead to discoloration.

Item no.	Application	Packaging units
100220	Acid-free passivation of stainless steel	10 KG container